


Overload system

Model:JL-5000-043

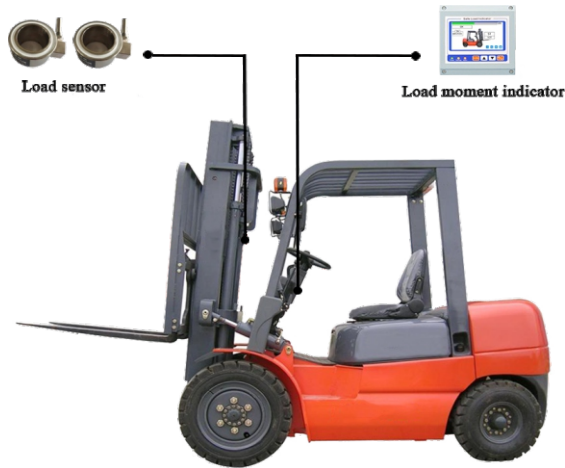

DI	5 channels low level
DO	5 channels configurable high and low levels
AI	4 channels (4~20mA/0~5V/0~10mV optional)
RS485/RS232	1 channel protocol, only 1 channel at one time
CAN	1 channel CAN 2.0B
AO	1 channel 4~20mA


LMI set

Supply voltage	DC24V/DC12V
Working temperature	-20°C ~ 60°C
Working humidity	< 95% (25°C)
Working method	Continuous
Alarm error	< 3%
System comprehensive error	$\leq \pm 5\%$
Resolution	0.1(t)

LMI display

Protection level	IP56
Display type	Integrated
Operation	Button type
Screen size	4.3inch
Resolution	480*270
Display size	140*140*75.5(mm)
Weight	1.20 kg

Model:JL-1000-C

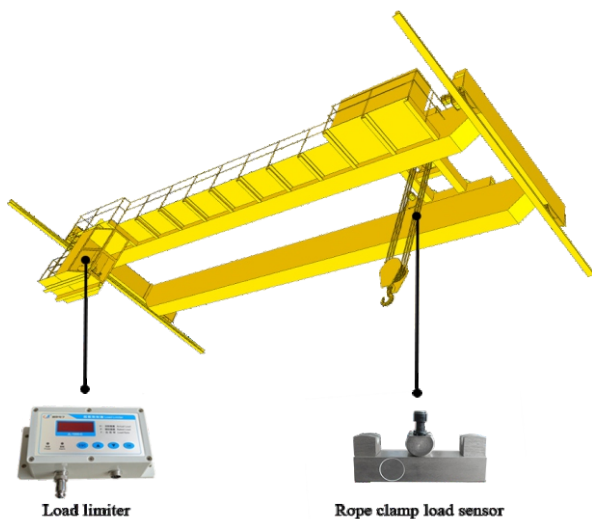

LMI set

Power supply voltage	AC220V/DC24V
Working temperature	-20°C~ 60°C
Relative humidity	<95% (25°C)
Working method	continuous
Resolution	0.1(t)
System comprehensive error	$\leq \pm 5\%$
Alarm error	<3%
Display size	197.5*90*60(mm)
Protection level	IP56